



Technical Catalogue

Smart Locks

Tedee PRO	2
Tedee GO2	3
Tedee GO2 Adapter Sets	4
Tedee GO2 Adapters	5
Tedee GO2 Z-Wave	6

Smart Access Devices

Tedee Bridge	7
Tedee Bridge sets	8
Power Adapters	10
Tedee Keypad PRO	12
Tedee Door Sensor	13

Smart Modules

Tedee Biometric Module	14
Tedee Dry Contact	15
BleBox Smart Relay Module	16

European Cylinders

GERDA SLR	17
GERDA EXXO	18
M&C SKG***	29
GERDA H PLUS	20

Hardware

Tedee GO Bar adapter	21
Australian Oval Mortise adapter	22
Deadbolt Adapter	23
Euro Adapter	24
Nordic Adapter	25
Japanese Adapter	26
Faceplate Adapter	27

Accessories

Tedee Keypad PRO Flush Wall Mount	28
Tedee PRO Magnetic Charging Cable	29
Tedee GO(2) Rechargeable Battery Set	30
Service Knob	31

Demonstration Displays

Demonstration Display Stand	32
Mini Euro Display Stand	33

September 2026

Tedee PRO

Smart Lock

Colour	Model	EAN	SKU
Silver / White	TLV1.0 A HK	5907720713256	11100040
Black	TLV1.0 B HK	5907720713270	11101040
Stainless Steel	TLV1.0 C HK	5907720713980	11102040
Gold	TLV1.0 D HK	5907720713973	

Wholesale unit	20pcs / box
Set contents	Tedee PRO / Magnetic charging cable / Allen key / Mini Manual / Health & Safety Information booklet / Activation Code card / Apple Home setup code card

	Width	Height	Depth	Weight
Device only	Ø 45 mm		55 mm	196 g
Packaged device	139 mm	131 mm	62 mm	371 g

Parameter	Value	Notes
Torque	2.0 Nm	Locking force
Mechanical lifespan	200 000 cycles	Locking-Unlocking procedures
Power source	3000 mAh LiPo battery	Rechargeable via micro-USB
Battery life	Up to 6-10 months	Up to 8 cycles per day
Working temperature	10–40 °C	Indoor use only

Certifications



Compatible Door Hardware

Euro-Profile			Scandinavian Adapter	Deadbolt Adapter	Swiss Cylinder
Tedee-ready Cylinders	Tedee PRO Euro Adapter	Professional shaft	Oval Mortise Adapter	Japanese Adapter	Faceplate Adapter

Tedee GO2

Smart Lock

Colour	Model	EAN	SKU
Silver Aluminium / White	TLV2.0 AA	5906288550457	
Black Aluminium	TLV2.0 BA	5906288550464	

Wholesale unit	20pcs / box
Set contents	Tedee GO2 / 3 x CR123 batteries / Allen key / Mini Manual / Health & Safety Information booklet / Activation Code card

	Width	Height	Depth	Weight
Device only	Ø 58 mm		65 mm	207 g
Device with batteries				263 g
Packaged device	90 mm	130 mm	74 mm	372 g

Parameter	Value	Notes
Torque	1.6 Nm	Locking force
Mechanical lifespan	150 000 cycles	Locking-Unlocking procedures
Power source	3 x CR123A/R	Replaceable batteries
Battery life	Up to 6-8 months	Up to 8 cycles per day
Working temperature	10–40 °C	Indoor use only

Certifications



Compatible Door Hardware

Euro-Profile Requires Tedee GO2 European Adapter			Scandinavian Adapter + Bar Adapter	Tedee GO2 Deadbolt Adapter	Swiss Cylinder + Bar Adapter
Double-Clutch cylinder	Tedee-ready Cylinder + Bar Adapter	Professional shaft + Bar Adapter	Oval Mortise Adapter + Bar Adapter	Faceplate Adapter + Bar Adapter	

Tedee GO2 Adapter Sets

Smart Lock with a Retrofit Door Lock Adapter

Variation	EAN	SKU
Tedee GO2 European Adapter Set (Silver Aluminium / White)	5906288550853	
Tedee GO2 European Adapter Set (Black Aluminium)	5906288550860	
Tedee GO2 Deadbolt Adapter Set (Silver Aluminium / White)	5906288551225	
Tedee GO2 Deadbolt Adapter Set (Black Aluminium)	5906288551218	

Wholesale unit	N/A
Set contents	Tedee GO2 and Adapter boxes in a single, retail-ready packaging

Tedee GO2 European Adapter Set

Measurements	Width	Height	Depth	Weight
Packaged set	117 mm	135 mm	73 mm	467 g



Tedee GO2 Deadbolt Adapter Set

Measurements	Width	Height	Depth	Weight
Packaged set	117 mm	135 mm	73 mm	565 g



Tedee GO2 Adapters

Retrofit Adapters for Tedee GO2

Variation	EAN	SKU
European (Silver)	5906288550143	
Deadbolt (Silver)	5906288550174	
Deadbolt (Black)	5906288550167	

Wholesale unit	80pcs / box
----------------	-------------

Tedee GO2 European Adapter

Measurements	Width	Height	Depth	Weight
Device only	52 mm	60 mm	8 mm	37 g
Packaged device	70 mm	130 mm	23 mm	64 g

Set Contents	Tedee GO2 European Adapter / Cleansing Pad / Measuring Card / Mini Manual
--------------	---



Tedee GO2 Deadbolt Adapter

Measurements	Width	Height	Depth	Weight
Device only	Ø 65 mm		14 mm	126 g
Packaged device	73 mm	130 mm	24 mm	165 g

Set Contents	Tedee GO2 Deadbolt Adapter / 4 x Tailpiece shafts / Mini Manual
--------------	---



Tedee GO2 Z-Wave

Proven retrofit mechanism with Z-Wave® connectivity
for local alarm and smart home integrations



Colour	Model	EAN	SKU
Silver / White	TLV2.0Z A	5906288551423	

Wholesale unit	20pcs / box
Set contents	Tedee GO2 Z-Wave / 3 x CR123 batteries / Allen key / Mini Manual / Health & Safety Information booklet / Activation Code card

	Width	Height	Depth	Weight
Device only	Ø 58 mm		65 mm	207 g
Device with batteries				263 g
Packaged device	90 mm	130 mm	74 mm	372 g

Z-Wave	Value
Protocols	Z-Wave and Z-Wave Long Range
Security class	Z-Wave S2 Access Control
Frequency plan	European (868.4 / 869.85 MHz)
Inclusion methods	SmartStart (controller-dependent) or manual inclusion
Compatible Tedee devices	Tedee Keypad PRO (PIN access only - no fingerprints)

Parameter	Value	Notes
Torque	1.6 Nm	Locking force
Mechanical lifespan	150 000 cycles	Locking-Unlocking procedures
Power source	3 x CR123A/R	Replaceable batteries
Battery life	Up to 6-8 months	Up to 8 cycles per day
Working temperature	10–40 °C	Indoor use only
Body cover material	Plastic	

Certifications
 



Tedee Bridge

Wireless Router

Model	EAN	SKU
TBV1.0 A	5907720713010	12100010

Wholesale unit	40pcs / box
Set contents	Tedee Bridge / Mini Manual / Health & Safety Information booklet

	Width	Height	Depth	Weight
Device only	64.5 mm	63.5 mm	28 mm	52 g
Packaged device	70 mm	130 mm	47 mm	107 g

Parameter	Value	Notes
Operating conditions	10-40°C / max 65% humidity	Indoor use only
Power source	Power Adapter or micro-USB	Power adapter sets available
Power supply	5V = 300 mA	
Wi-Fi communication	2.4 GHz	
Bluetooth communication	BLE 5.0 2.4 GHz	
Security protocol	TLS 1.3	
Recommended setup	max. 2 m from Tedee smart lock; 1-10 m from Wi-Fi router	

Certifications



Tedee Bridge sets

Wireless Router with a Power Adapter in a Single Retail-Ready Box

Variation	Model	EAN	SKU
Tedee Bridge American set (Type A)	TBV1.0 A US	5905868652925	
Tedee Bridge Australian set (Type I)	TBV1.0 A AU	5905868652932	
Tedee Bridge British set (Type G)	TBV1.0 A UK	5905868652918	
Tedee Bridge European set (Type C/E/F)	TBV1.0 A EU	5905868652901	

Wholesale unit	20 pcs / box
Set contents	Tedee Bridge and Power Adapter boxes in a single retail-ready packaging

Tedee Bridge American set (Type A)

Measurements	Width	Height	Depth	Weight
Device only	64.5 mm	63.5 mm	84 mm	91 g
Packaged device	94 mm	136 mm	72 mm	209 g




Tedee Bridge Australian set (Type I)

Measurements	Width	Height	Depth	Weight
Device only	64.5 mm	63.5 mm	94 mm	95 g
Packaged device	94 mm	136 mm	72 mm	213 g



Tedee Bridge British set (Type G)

Measurements	Width	Height	Depth	Weight
Device only	64.5 mm	63.5 mm	100 mm	101 g
Packaged device	94 mm	136 mm	72 mm	219 g

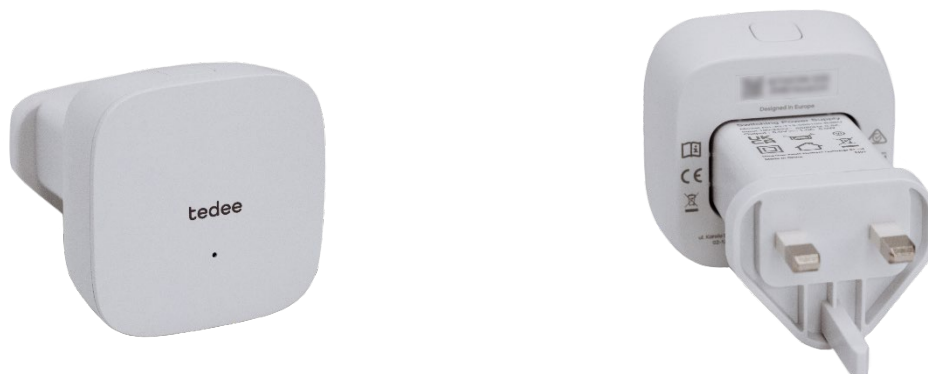

Tedee Bridge European set (Type C/E/F)

Measurements	Width	Height	Depth	Weight
Device only	64.5 mm	63.5 mm	106 mm	94 g
Packaged device	94 mm	136 mm	72 mm	212 g



Power Adapters

Wall Chargers for Tedee Bridge

Variation	EAN	SKU
American (Type A)	5905868652826	
Australian (Type I)	5905868652833	
British (Type G)	5905868652857	
European (Type C/E/F)	5905868652840	
Japanese (Type 2A)	5906288550877	

Wholesale unit	100pcs / box
----------------	--------------

American power adapter (Type A)

Measurements	Width	Height	Depth	Weight
Device only	37 mm	25 mm	69 mm	43 g
Packaged device	70 mm	131 mm	47 mm	76 g

Certifications			
			



Australian power adapter (Type I)

Measurements	Width	Height	Depth	Weight
Device only	40 mm	30 mm	77 mm	47 g
Packaged device	70 mm	131 mm	47 mm	81 g

Certifications		
		



British power adapter (Type G)

Measurements	Width	Height	Depth	Weight
Device only	41 mm	49 mm	83 mm	52 g
Packaged device	70 mm	131 mm	47 mm	86 g

Certifications**European power adapter (Type C/E/F)**

Measurements	Width	Height	Depth	Weight
Device only	38 mm	25 mm	90 mm	46 g
Packaged device	70 mm	131 mm	47 mm	80 g

Certifications**Japanese power adapter (Type 2A)**

Measurements	Width	Height	Depth	Weight
Device only	37 mm	25 mm	69 mm	43 g
Packaged device	70 mm	131 mm	47 mm	76 g

Certifications

Tedee Keypad PRO

Smart Biometric Keypad

Colour	Model	EAN	SKU
White	TKV2.0 A	5906288550013	
Black	TKV2.0 B	5906288550020	

Wholesale unit	40pcs/box
Set Contents	Tedee Keypad PRO / 4 x AAA batteries / 4 x Wall plugs and mounting screws / Wired input adapter cable / Activation code card / Mini Manual / Safety information booklet

Measurements	Width	Height	Depth	Weight
Device only	33 mm	125 mm	24 mm	68 g
Device with batteries				115 g
Packaged device	70 mm	131 mm	47 mm	134 g

Parameter	Value	Notes
Operating Temperature	-18°C to +54 °C	With included batteries
	-30°C to +54 °C	With wired power input or Li-ion batteries
Operating Humidity	Up to 95%	IP54 / Suitable for outdoor use
Power supply	4x LR03 AAA 1.5 V batteries or 5-24V DC, 0.5 A wired input	
Battery life	12+ months	
Bluetooth communication	BLE 5.2 2.4 GHz	from 2.4 GHz to 2.483 GHz (Max output power: 8 dBm)
Unlocking credentials	100 PINs / 100 fingerprint scans	
Installation method	Adhesive pad (pre-applied) / Wall plugs and screws (included) / Flush wall mount (sold separately)	
Recommended Setup	Max. 2 m from Tedee smart lock and Tedee Bridge	

Certifications



Tedee Door Sensor

Smart Sensor

Colour	Model	EAN	SKU
White	TDSV1.0 A	5906288550112	
Black	TDSV1.0 B	5906288550341	

Wholesale unit	80pcs / box
Set Contents	Tedee Door Sensor / Magnet / CR2032 battery / Battery cover opening pin / Activation Code card / Mini Manual / Health & Safety information booklet

Measurements	Width	Height	Depth	Weight
Sensor module	30 mm	64 mm	14 mm	17 g
Magnet module	17 mm	64 mm	7 mm	13 g
Packaged device	70 mm	130 mm	23 mm	84 g

Parameter	Value	Notes
Operating conditions	5 °C to 50 °C / Max. 95% humidity	Indoor use only
Power supply	CR2032 battery	
Battery life	Up to 2 years	
Bluetooth communication	BLE 5.2 2.4 GHz	2.4 GHz to 2.483 GHz (Max output power: 8 dBm)
Installation method	Adhesive pads (pre-applied)	
Recommended Setup	Max. 2 m from the Tedee smart lock	

Certifications



Tedee Biometric Module

Tedee-Compatible Wireless Fingerprint Scanner for Integration into Pull Bars

Model	EAN	SKU
TBMV1.0	5906288550914	

Wholesale unit	N/A
Set contents	Tedee Biometric Module / Battery Pack / 2 x Masking glass panel / 3 x Foam mounts / Activation Code card / Mini Manual / Health & Safety Information booklet

Measurements	Width	Height	Depth	Weight
Device only	25 mm	52 mm	15.5 mm	11 g
Packaged device	70 mm	260 mm	23 mm	TBC

Parameter	Value	Notes
Operating conditions	-30 °C to 50 °C / max. 95% humidity	Suitable for outdoor use
Power supply	4,5V, 3500 mAh LiFeS2 battery pack	Non-serviceable, non-rechargeable
Battery life	Up to 10 years	
Bluetooth communication	BLE 5.2 2.4 GHz	from 2.4 GHz to 2.483 GHz (max. output power: 8 dBm)
Unlocking credentials	100 fingerprint scans	
Installation method	Compatible pull bars	

Certifications



Tedee Dry Contact

Wired Control Module for Tedee Smart Locks

Model	EAN	SKU
TDCV1.0A	5905868652963	5905868652963

Wholesale unit	12pcs / box
Set Contents	Tedee Dry Contact / Mini Manual / Health & Safety Information Booklet

Measurements	Width	Height	Depth	Weight
Device only	57.5 mm	44.5 mm	16 mm	22 g
Packaged device	70 mm	130 mm	23 mm	69 g

Parameter	Value	Notes
Operating conditions	0-60 °C / max. 90% humidity	Indoor use only
Power supply	5-60V DC	
Bluetooth communication	BLE 5.2 2.4 GHz	from 2.4GHz to 2.483 GHz (max. output power: 8 dBm)
Number of inputs	2	Normally open
Number of outputs	2	Normally open

Certifications
CE PSTI



BleBox Smart Relay Module

Tedee app-Compatible Wired Control Module

Model	EAN	SKU
TRV1.0	5900168580251	41110010

Wholesale unit	N/A
----------------	-----

Measurements	Width	Height	Depth	Weight
Device only	39 mm	39 mm	22 mm	36 g
Packaged device	51 mm	40 mm	30 mm	40 g

Certifications
CE PSTI



GERDA SLR

Modular European Cylinder with Tedee-compatible Shaft

Model	Colour	Mechanism	Outside length	Inside length	EAN	SKU
A	Nickel	Cam	30 mm	30-61 mm	5902203333082	21120010
B	Nickel	Gear	30 mm	30-61 mm	5902203333099	21130010
C	Nickel	Cam	37-68 mm	30-61 mm	5902203333037	21100010
C	Black	Cam	37-68 mm	30-61 mm	5907452113850	
D	Nickel	Gear	37-68 mm	30-61 mm	5902203333044	21110010

Wholesale unit	N/A
Set Contents	Cylinder / 4 x Spacers (6, 10, 10, 15mm) / 4 x Spacers spools (6, 10, 10, 15mm) / 16 x Clamping screws / 3 x Cushioning sticker / Mounting screw / 3 x Keys / Key code card / Allen key / Documentation

Measurements	Width	Height	Depth	Weight
Packaged device	141 mm	131 mm	31 mm	390g (A) / 403g (B) / 486g (C) / 499g (D)

Certifications

Security class 6 according to PN-EN 1303:2015 norm



GERDA EXXO Smart

Modular European Cylinder with Tedee-compatible Shaft

Colour	Mechanism	Outside length	Inside length	EAN	SKU
Nickel	Cam	31-62 mm	31-62 mm	5907452031352	
Black	Cam	31-62 mm	31-62 mm	5907452031369	

Wholesale unit	N/A
Set Contents	Cylinder / 4 x Spacers (6, 10, 15, 15mm) / 4 x Spacers spools (6, 10, 15, 15mm) / 16 x Clamping screws / Mounting screw / 5 x Keys / Key code card / Allen key / Documentation / Tedee GO Bar Adapter

Measurements	Width	Height	Depth	Weight
Packaged device	70 mm	131 mm	47 mm	TBC

Certifications
Security class 6 according to PN-EN 1303:2015-07 norm



M&C SKG***

Modular European Cylinder with Tedee-compatible Shaft

Mechanism	Outside length	Inside length	EAN	SKU
Cam	32-47 mm	30-45 mm	8717198013577	22100010

Wholesale unit	N/A
Set Contents	Key module / Shaft module / Cam module / 3 x Spacers (5, 5, 10mm) / 2 x Bars / Clamping screws / Mounting screw / 3 x Keys / Key code card / 2 x Allen key / Documentation

Measurements	Width	Height	Depth	Weight
Packaged device	126 mm	70 mm	41 mm	360 g

Certifications



GERDA H PLUS

European Thumb turn Cylinder with Tedee-compatible shaft

Mechanism	Outside length	Inside length	EAN	SKU
Cam	30 mm	30 mm	5907452106111	
Cam	35 mm	35 mm	5907452106128	
Cam	30 mm	40 mm	5907452126119	
Cam	35 mm	40 mm	5907452106135	
Cam	40 mm	40 mm	5907452106142	
Cam	45 mm	40 mm	5907452106159	
Cam	40 mm	45 mm	5907452106166	
Cam	45 mm	45 mm	5907452106173	
Cam	45 mm	50 mm	5907452106180	
Cam	50 mm	50 mm	5907452106197	
Cam	55 mm	55 mm	5907452106203	

Wholesale unit	N/A
Set Contents	Cylinder / Thumb turn Knob / Mounting screw / 5 x keys / Key Code Card / Documentation

Measurements	Width	Height	Depth	Weight
Packaged device	140 mm	130 mm	30 mm	approx. 450 g

Certifications
Security class 3 according to PN-EN 1303:2015-07 norm



Tedee GO(2) Bar Adapter

EAN	SKU
5902203692325	35100010

Wholesale unit	N/A
----------------	-----

Measurements	Width	Height	Depth	Weight
Device only	30 mm	22 mm	3 mm	5 g
Packaged device	62 mm	94 mm	3 mm	5 g



Australian Oval Mortise Adapter

Variation	EAN	SKU
20mm	5902203701409	
25mm	5902203701416	
30mm	5902203701423	

Wholesale unit	N/A
Set Contents	Adapter / Cylinder plate / Documentation

Measurements	Width	Height	Depth	Weight
Device only	18 mm	31 mm	32 mm / 37 mm / 42 mm	76 g / 96 g / 114 g
Packaged device	70 mm	130 mm	23 mm	112 g / 132 g / 152 g



Deadbolt Adapter

Colour	EAN	SKU
Silver	5902203387498	34100010
Black	5902203387504	34110010

Wholesale unit	25pcs/box
Set Contents	Adapter / 2 x Mounting screws

Measurements	Width	Height	Depth	Weight
Device only	Ø65 mm		30 mm	86 g
Packaged device	125 mm	70 mm	45 mm	145 g



Tedee PRO Euro Adapter

Colour	EAN	SKU
Silver	5902203352281	32100010
Graphite	5902203352267	32110010

Wholesale unit	N/A
Set Contents	Adapter / Shaft / Clamping screw / 2 x mounting screws / Torx key / Documentation

Measurements	Width	Height	Depth	Weight
Device only	Ø 37 mm		17 mm	26 g
Packaged device	141 mm	131 mm	31 mm	167 g



Nordic Adapter

Colour	EAN	SKU
Silver	5902203352274	31100010
Black	5902203352250	31110010

Wholesale unit	N/A
Set Contents	Adapter / Tailpiece / Plate / 2 x plate mounting screws / Documentation

Measurements	Width	Height	Depth	Weight
Device only	Ø53 mm		30 mm	87 g
Packaged device	141 mm	131 mm	62 mm	225 g



Japanese Adapter

Variation	EAN	SKU
30-42mm	5907452099802	
42-58mm	5907452099819	

Wholesale unit	N/A
Set Contents	Adapter / Shaft / 2 x mounting screws

Measurements	Width	Height	Depth	Weight
Device only		TBC	42 mm/58 mm	100 g / 150 g
Packaged device	90 mm	132 mm	42 mm/58 mm	100 g / 150 g



Faceplate Adapter

EAN	SKU
5907452000556	8301409000

Wholesale unit	N/A
Set Contents	Adapter / Bolt

Measurements	Weight
Device only	32 g






Tedee Keypad PRO Flush Wall Mount

Colour	EAN	SKU
White	5907452184911	
Black	5907452184928	

Wholesale unit	N/A
Set Contents	Wall box / Magnetic mounting plate / 4 x Mounting screws / Removal pin

Measurements	Width	Height	Length	Weight
Packaged device	90 mm	165 mm	60 mm	119 g

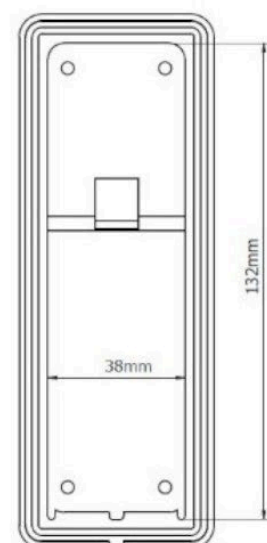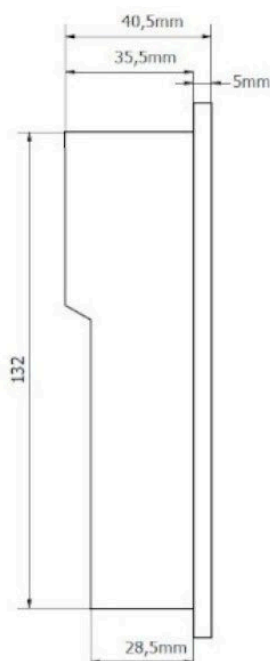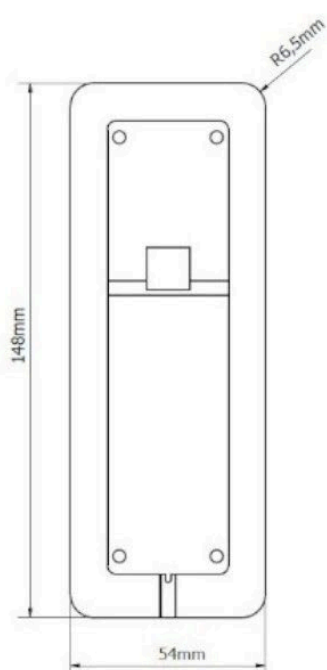

Tedee PRO Magnetic Charging Cable

Colour	EAN	SKU
Silver	5905868652802	82200010
Black	5905868652819	82200010B

Wholesale unit	N/A
----------------	-----

Measurements	Width	Height	Length	Weight
Device only	15 mm	6 mm	2 m	37 g
Packaged device	70 mm	130 mm	23 mm	70 g




Tedee GO(2) USB-C Rechargeable Battery Set

EAN	SKU
6972443865000	

Wholesale unit	N/A
Set Contents	3 x CR123 rechargeable batteries / Triple micro-USB to USB-C cable

Measurements	Width	Height	Length	Weight
Device only	15 mm	7 mm	3 x 150mm	67 g
Packaged device	70 mm	130 mm	23 mm	89 g

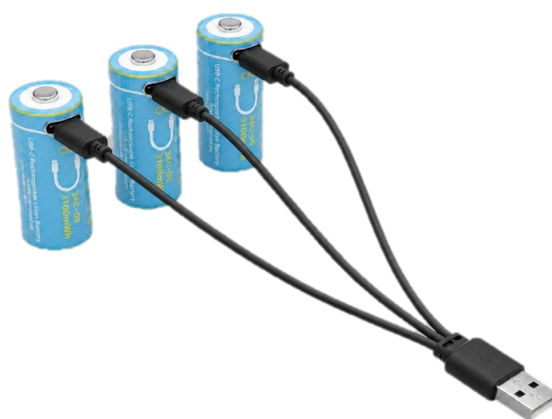

Service Knob

Colour	EAN	SKU
Silver	5902203353615	82300010
Black	N/A	08082025

Wholesale unit	N/A
----------------	-----

Measurements	Width	Height	Depth	Weight
Device only	Ø30 mm		35 mm	60 g



Demonstration Display Stand

Mock-up door with a cylinder – no smart lock included

EAN	SKU
5902203376638	93100010

Wholesale unit	N/A
----------------	-----

Measurements	Width	Height	Depth	Weight
Device only	200 mm	200 mm	305 mm	3471 g
Packaged device	280 mm	350 mm	290 mm	4205 g



Mini Euro Display Stand

Euro-profile cylinder stand – no cylinder or smart lock included

EAN	SKU
5902203391082	95100010

Wholesale unit	N/A
----------------	-----

Width	Height	Depth	Weight
120 mm	120 mm	140 mm	356 g

